




Aviator AC - Cooling & Heating

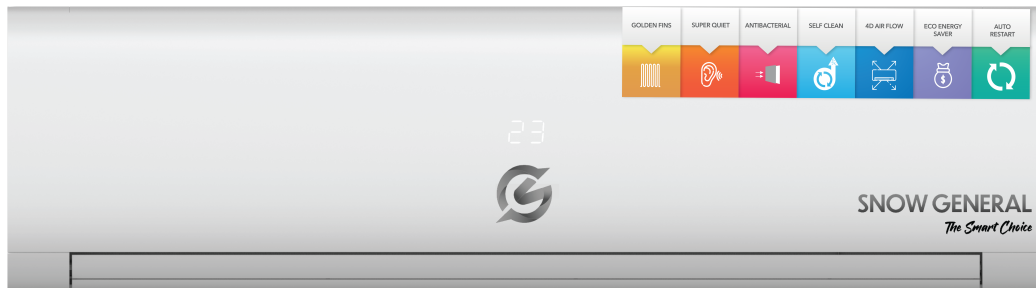

GS-R30HC

Type	T3 HeatPump
T3 Cooling Capacity (Btu/h)	30000
T3 Cooling Capacity (W)	8792
T3 Input Cooling (W)	2540
T3 EER for Cooling (Btu/W)	11.81
Heating Capacity (Btu/h)	29500
Heating Capacity (W)	8646
Input Heating (W)	2530
COP for Heating (W/W)	3.4
Air Circulation (CMH Max)	1800
Refrigerant	R410A / 2.07 kg
Indoor Noise Level High (dB(A))	48

Indoor Noise Level Low (dB(A))	43
Outdoor Noise Level (dB(A))	60
Power Supply (Voltage/Frequency/Phase)	220-240V/50Hz/1P
Cooling Current (A)	11.5
Heating Current (A)	11.4
Compressor Type	Rotary
Compressor MFG	Highly
Compressor Model	ATH290MV-C8FU
Expansion Device	Capillary
Evaporator	Copper and Aluminum Fin
Condenser	Copper and Aluminum Fin
Liquid Pipe (inch)	3/8
Gas Pipe (inch)	5/8
Indoor Unit Dimensions (mm)	1298 × 345 × 257
Outdoor Unit Dimensions (mm)	885 × 795 × 366
Net Weight Indoor (kg)	19.5
Net Weight Outdoor (kg)	60
Packing Dimensions Indoor (mm)	1425 × 435 × 325
Packing Dimensions Outdoor (mm)	1050 × 890 × 500
Gross Weight Indoor (kg)	22
Gross Weight Outdoor (kg)	66
Loading Capacity (40' HC)	48 / 100 / 114