SNOW GENERAL

The Smart Choice

Cooling Piston Compressor

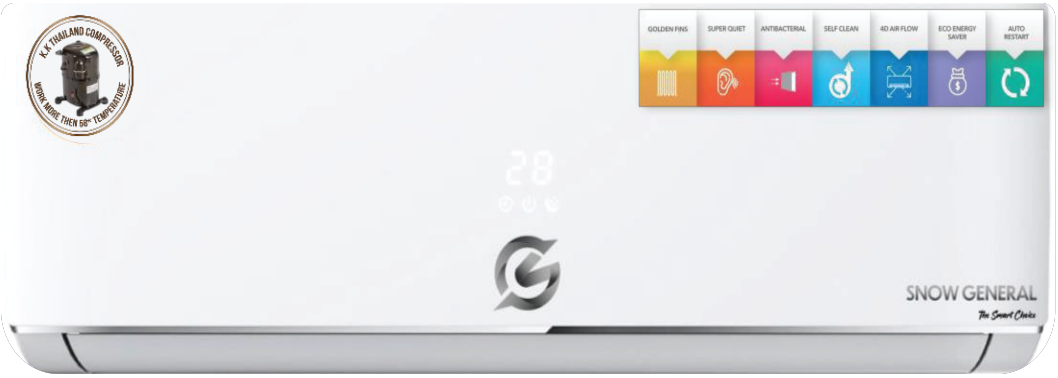

GS-P196C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	19000
ESMA Cooling Capacity (Btu/h)	15700
Rated Input Cooling (W)	2000 / 2310
Moisture Removal (L/h)	1.8
Air Circulation Super (m3/h)	1050
EER For Cooling (W/W)	2.75 / 2.08
Refrigerant (Type/Kg)	R22
I/U Noise Level High (dB(A))	42
O/U Noise Level (dB(A))	56
Power Supply (Voltage/Frequency)	220-240V~, 50Hz

Rated Current Cooling (A)	9.3 / 10.6
LRA (A)	51.3
Compressor Type	Reciprocating
Compressor MFG	KK - Made In Thailand
Compressor Model No	AW5524EK
Capacity (W)	6140
Input (W)	2089
Rated Current (RLA) A	9.64
Indoor Fan Motor Voltage, Frequency (V,Hz)	1, 208-240V~, 50Hz
Model	DG13B2-07
Power Supply (V)	12V DC
Output (W)	4
Expansion Device	Throttling Pipe
Connecting Pipe Liquid Diameter (inch)	1/4
Connecting Pipe Gas Diameter (inch)	1/2
Connecting Pipe Connecting Cable Diamater	3×1.5 mm2
Net Dimensions Indoor (mm)	960×315×235
Net Dimensions Outdoor (mm)	860×650×310
Net Weight Indoor (Kg)	12.5
Net Weight Outdoor (Kg)	51.5
Packing Dimensions Indoor (mm)	1022×380×302
Packing Dimensions Outdoor (mm)	995×420×720
Gross Weight Indoor (Kg)	14.5
Gross Weight Outdoor (Kg)	58.5
Loading Capacity (40' HC)	160

GS-P266C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	26000
ESMA Cooling Capacity (Btu/h)	20130
Rated Input Cooling (W)	2465 / 2840
Moisture Removal (L/h)	-
Air Circulation Super (m3/h)	1200
EER For Cooling (W/W)	2.75 / 2.08
Refrigerant (Type/Kg)	R22
I/U Noise Level High (dB(A))	45
O/U Noise Level (dB(A))	57
Power Supply (Voltage/Frequency)	220-240V~, 50Hz
Rated Current Cooling (A)	11.6 / 12.9
LRA (A)	73
Compressor Type	Reciprocating
Compressor MFG	KK - Made In Thailand
Compressor Model No	AW5530EK 65H - A1
Capacity (W)	7327
Input (W)	2498
Rated Current (RLA) A	12
Indoor Fan Motor Voltage, Frequency (V,Hz)	1, 208-240V~, 50Hz
Model	DG13B2-07 (30)
Power Supply (V)	12V DC
Output (W)	4

Expansion Device	Throttling Pipe
Connecting Pipe Liquid (inch)	1/4
Connecting Pipe Gas (inch)	5/8
Connecting Cable	3×2.5 mm2
Net Dimensions Indoor (mm)	1131×235×315
Net Dimensions Outdoor (mm)	995×720×420
Net Weight Indoor (Kg)	14.5
Net Weight Outdoor (Kg)	57
Packing Dimensions Indoor (mm)	1220×310×400
Packing Dimensions Outdoor (mm)	995x420x720
Gross Weight Indoor (Kg)	17
Gross Weight Outdoor (Kg)	64
Loading Capacity (40' HC)	150

GS-P326C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	32000
ESMA Cooling Capacity (Btu/h)	24907
Rated Input Cooling (W)	3030 / 3400
Moisture Removal (L/h)	-
Air Circulation Super (m3/h)	1680
EER For Cooling (W/W)	2.9 / 2.15
Refrigerant (Type/Kg)	R22
I/U Noise Level High (dB(A))	50
O/U Noise Level (dB(A))	60
Power Supply (Voltage/Frequency)	220-240V~, 50Hz
Rated Current Cooling (A)	13.6 / 15.2
LRA (A)	85
Compressor Type	Reciprocating
Compressor MFG	KK - Made In Thailand
Compressor Model No	AW5535EK
Capacity (W)	8617
Input (W)	2910
Rated Current (RLA) A	14.7
Indoor Fan Motor Voltage, Frequency (V,Hz)	1, 208-240V~, 50Hz
Model	24BYJ48
Power Supply (V)	12V DC
Output (W)	4

Expansion Device	Capillary
Connecting Pipe Liquid (inch)	3/8
Connecting Pipe Gas (inch)	5/8
Connecting Cable	4×1.0 mm2
Net Dimensions Indoor (mm)	1280×345×250
Net Dimensions Outdoor (mm)	1050×500×890
Net Weight Indoor (Kg)	19.5
Net Weight Outdoor (Kg)	64
Packing Dimensions Indoor (mm)	1385×435×325
Packing Dimensions Outdoor (mm)	1050×500×890
Gross Weight Indoor (Kg)	23
Gross Weight Outdoor (Kg)	75
Loading Capacity (40' HC)	104

GS-P376C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	37000
ESMA Cooling Capacity (Btu/h)	30366
Rated Input Cooling (W)	3650 / 4280
Moisture Removal (L/h)	-
Air Circulation Super (m3/h)	1680
EER For Cooling (W/W)	2.9 / 2.15
Refrigerant (Type/Kg)	R22
I/U Noise Level High (dB(A))	50
O/U Noise Level (dB(A))	60
Power Supply (Voltage/Frequency)	220-240V~, 50Hz
Rated Current Cooling (A)	17.6 / 19.5
LRA (A)	85
Compressor Type	Reciprocating
Compressor MFG	KK - Made In Thailand
Compressor Model No	AW5542E
Capacity (W)	10522
Input (W)	3550
Rated Current (RLA) A	17
Indoor Fan Motor Voltage, Frequency (V,Hz)	1, 208-240V~, 50Hz
Model	DG13B1-01
Power Supply (V)	12V DC
Output (W)	4

Expansion Device	Throttling Pipe
Connecting Pipe Liquid (inch)	3/8
Connecting Pipe Gas (inch)	3/4
Connecting Cable	4×1.0 mm2
Net Dimensions Indoor (mm)	1280x345x250
Net Dimensions Outdoor (mm)	1050×500×890
Net Weight Indoor (Kg)	19.5
Net Weight Outdoor (Kg)	68
Packing Dimensions Indoor (mm)	1385×435×325
Packing Dimensions Outdoor (mm)	1050×500×890
Gross Weight Indoor (Kg)	23
Gross Weight Outdoor (Kg)	79
Loading Capacity (40' HC)	104