




## Cooling Piston Compressor

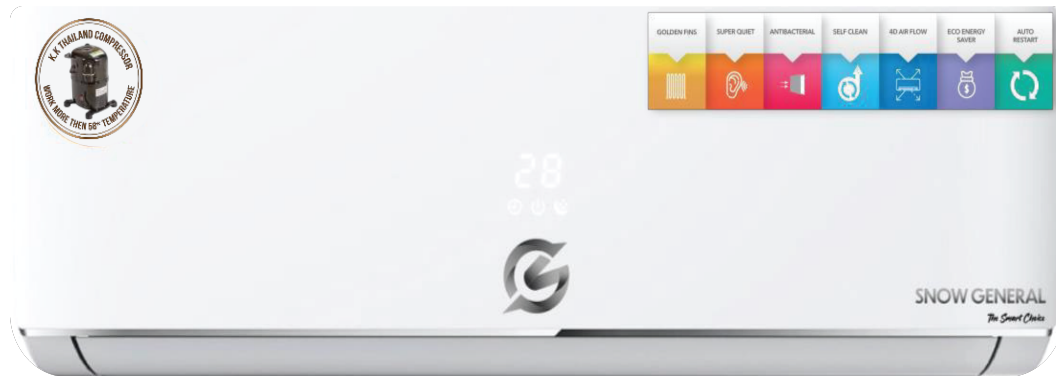

GS-P196C

<b>Type</b>	T3, Cooling only
<b>Rated T1 Cooling Capacity (Btu/h)</b>	19000
<b>ESMA Cooling Capacity (Btu/h)</b>	15700
<b>Rated Input Cooling (W)</b>	2000 / 2310
<b>Moisture Removal (L/h)</b>	1.8
<b>Air Circulation Super (m3/h)</b>	1050
<b>EER For Cooling (W/W)</b>	2.75 / 2.08
<b>Refrigerant (Type/Kg)</b>	R22
<b>I/U Noise Level High (dB(A))</b>	42
<b>O/U Noise Level (dB(A))</b>	56
<b>Power Supply (Voltage/Frequency)</b>	220-240V~, 50Hz
<b>Rated Current Cooling (A)</b>	9.3 / 10.6

<b>LRA (A)</b>	51.3
<b>Compressor Type</b>	Reciprocating
<b>Compressor MFG</b>	KK - Made In Thailand
<b>Compressor Model No</b>	AW5524EK
<b>Capacity (W)</b>	6140
<b>Input (W)</b>	2089
<b>Rated Current (RLA) A</b>	9.64
<b>Indoor Fan Motor Voltage, Frequency (V,Hz)</b>	1, 208-240V~, 50Hz
<b>Model</b>	DG13B2-07
<b>Power Supply (V)</b>	12V DC
<b>Output (W)</b>	4
<b>Expansion Device</b>	Throttling Pipe
<b>Connecting Pipe Liquid Diameter (inch)</b>	1/4
<b>Connecting Pipe Gas Diameter (inch)</b>	1/2
<b>Connecting Pipe Connecting Cable Diameter</b>	3x1.5 mm <sup>2</sup>
<b>Net Dimensions Indoor (mm)</b>	960x315x235
<b>Net Dimensions Outdoor (mm)</b>	860x650x310
<b>Net Weight Indoor (Kg)</b>	12.5
<b>Net Weight Outdoor (Kg)</b>	51.5
<b>Packing Dimensions Indoor (mm)</b>	1022x380x302
<b>Packing Dimensions Outdoor (mm)</b>	995x420x720
<b>Gross Weight Indoor (Kg)</b>	14.5
<b>Gross Weight Outdoor (Kg)</b>	58.5
<b>Loading Capacity (40' HC)</b>	160