




## Cooling Piston Compressor

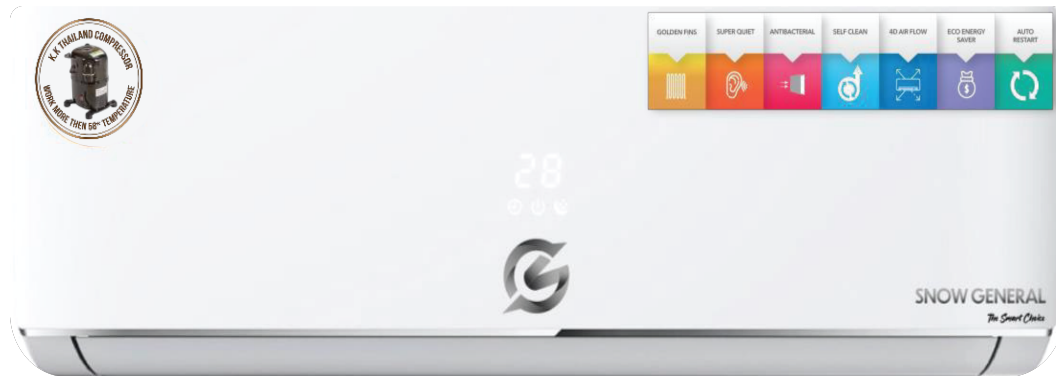

GS-P376C

<b>Type</b>	T3, Cooling only
<b>Rated T1 Cooling Capacity (Btu/h)</b>	37000
<b>ESMA Cooling Capacity (Btu/h)</b>	30366
<b>Rated Input Cooling (W)</b>	3650 / 4280
<b>Moisture Removal (L/h)</b>	-
<b>Air Circulation Super (m3/h)</b>	1680
<b>EER For Cooling (W/W)</b>	2.9 / 2.15
<b>Refrigerant (Type/Kg)</b>	R22
<b>I/U Noise Level High (dB(A))</b>	50
<b>O/U Noise Level (dB(A))</b>	60
<b>Power Supply (Voltage/Frequency)</b>	220-240V~, 50Hz
<b>Rated Current Cooling (A)</b>	17.6 / 19.5

<b>LRA (A)</b>	85
<b>Compressor Type</b>	Reciprocating
<b>Compressor MFG</b>	KK - Made In Thailand
<b>Compressor Model No</b>	AW5542E
<b>Capacity (W)</b>	10522
<b>Input (W)</b>	3550
<b>Rated Current (RLA) A</b>	17
<b>Indoor Fan Motor Voltage, Frequency (V,Hz)</b>	1, 208-240V~, 50Hz
<b>Model</b>	DG13B1-01
<b>Power Supply (V)</b>	12V DC
<b>Output (W)</b>	4
<b>Expansion Device</b>	Throttling Pipe
<b>Connecting Pipe Liquid (inch)</b>	3/8
<b>Connecting Pipe Gas (inch)</b>	3/4
<b>Connecting Cable</b>	4x1.0 mm <sup>2</sup>
<b>Net Dimensions Indoor (mm)</b>	1280x345x250
<b>Net Dimensions Outdoor (mm)</b>	1050x500x890
<b>Net Weight Indoor (Kg)</b>	19.5
<b>Net Weight Outdoor (Kg)</b>	68
<b>Packing Dimensions Indoor (mm)</b>	1385x435x325
<b>Packing Dimensions Outdoor (mm)</b>	1050x500x890
<b>Gross Weight Indoor (Kg)</b>	23
<b>Gross Weight Outdoor (Kg)</b>	79
<b>Loading Capacity (40' HC)</b>	104