




## Diamond Series - Rotary

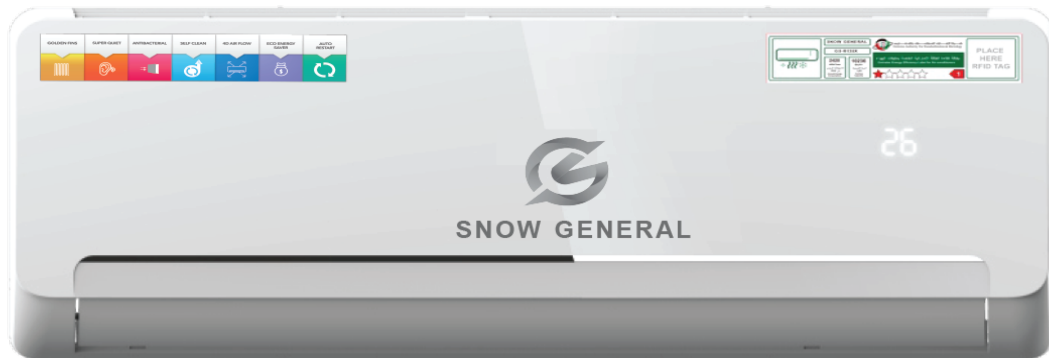

### GS-R135X

<b>T1 Cooling Capacity (Btu/h)</b>	12000
<b>T3 Cooling Capacity (W)</b>	3000
<b>T3 EER for Cooling (Btu/h)/W</b>	11.88(Btu/h)W   8.48(Btu/h)W
<b>Cooling Power (kW)</b>	1.01kw   1.21kw
<b>Cooling Current (A)</b>	4.5A   5.3A
<b>Max Power Input (kW)</b>	1.4kW
<b>Max Current (A)</b>	10.0A
<b>Air Volume (m3/h)</b>	600m3/h
<b>Power Supply</b>	220-240V~/50Hz
<b>Max High Pressure (MPa)</b>	4.3MPa
<b>Max Low Pressure (MPa)</b>	1.15MPa

<b>Inside Noise Level (dB(A))</b>	41dB(A)
<b>Outside Noise Level (dB(A))</b>	53dB(A)
<b>Compressor Type</b>	T3 Rotary
<b>Compressor MFG</b>	HIGHLY
<b>Compressor Model</b>	ASG130MV-AT3
<b>Indoor Unit Dimensions (mm)</b>	837x296x205
<b>Outdoor Unit Dimensions (mm)</b>	795x525x290
<b>Net Weight Indoor Unit (kg)</b>	9.5kg
<b>Net Weight Outdoor Unit (kg)</b>	31kg
<b>Gross Weight Indoor Unit (kg)</b>	12kg
<b>Gross Weight Outdoor Unit (kg)</b>	35kg
<b>Electric Shock Prevention</b>	Class I
<b>Waterproof Class Indoor</b>	IPX0
<b>Waterproof Class Outdoor</b>	IPX4
<b>Refrigerant</b>	R410A
<b>Charge (kg)</b>	0.83kg
<b>Loading Capacity (40' HC)</b>	210

## GS-R195X

<b>T1 Cooling Capacity (Btu/h)</b>	18000
<b>T3 Cooling Capacity (W)</b>	4483
<b>T3 EER for Cooling (Btu/h)/W</b>	11.942(Btu/h)/W   8.53(Btu/h)/W
<b>Cooling Power (kW)</b>	1.47kw   1.79kw
<b>Cooling Current (A)</b>	6.8A   8.1A
<b>Max Power Input (kW)</b>	3.0kW
<b>Max Current (A)</b>	14.0A
<b>Air Volume (m<sup>3</sup>/h)</b>	950m <sup>3</sup> /h
<b>Power Supply</b>	220-240V~/50Hz
<b>Max High Pressure (MPa)</b>	4.3MPa
<b>Max Low Pressure (MPa)</b>	1.15MPa
<b>Inside Noise Level (dB(A))</b>	47dB(A)
<b>Outside Noise Level (dB(A))</b>	57dB(A)
<b>Compressor Type</b>	T3 Rotary
<b>Compressor MFG</b>	GMCC
<b>Compressor Model</b>	KSF180V1UKPC3
<b>Indoor Unit Dimensions (mm)</b>	952x310x227
<b>Outdoor Unit Dimensions (mm)</b>	830x660x315
<b>Net Weight Indoor Unit (kg)</b>	12.5kg
<b>Net Weight Outdoor Unit (kg)</b>	42.5kg
<b>Gross Weight Indoor Unit (kg)</b>	14.5kg
<b>Gross Weight Outdoor Unit (kg)</b>	47.5kg
<b>Electric Shock Prevention</b>	Class I

<b>Waterproof Class Indoor</b>	IPX0
<b>Waterproof Class Outdoor</b>	IPX4
<b>Refrigerant</b>	R410A
<b>Charge (kg)</b>	1.03kg
<b>Loading Capacity (40' HC)</b>	155

## GS-R265X

<b>T1 Cooling Capacity (Btu/h)</b>	24000
<b>T3 Cooling Capacity (W)</b>	5833
<b>T3 EER for Cooling (Btu/h)/W</b>	12.28(Btu/h)/W   8.87(Btu/h)/W
<b>Cooling Power (kW)</b>	1.86kW   2.24kW
<b>Cooling Current (A)</b>	7.9A   9.5A
<b>Max Power Input (kW)</b>	3.2kW
<b>Max Current (A)</b>	14.0A
<b>Air Volume (m<sup>3</sup>/h)</b>	1300m <sup>3</sup> /h
<b>Power Supply</b>	220-240V~/50Hz
<b>Max High Pressure (MPa)</b>	4.3MPa
<b>Max Low Pressure (MPa)</b>	1.15MPa
<b>Inside Noise Level (dB(A))</b>	50dB(A)
<b>Outside Noise Level (dB(A))</b>	59dB(A)
<b>Compressor Type</b>	T3 Rotary
<b>Compressor MFG</b>	GMCC
<b>Compressor Model</b>	ASG220S1SMP
<b>Indoor Unit Dimensions (mm)</b>	1082x330x233
<b>Outdoor Unit Dimensions (mm)</b>	900x700x350
<b>Net Weight Indoor Unit (kg)</b>	13kg
<b>Net Weight Outdoor Unit (kg)</b>	47.5kg
<b>Gross Weight Indoor Unit (kg)</b>	17.5kg
<b>Gross Weight Outdoor Unit (kg)</b>	53kg
<b>Electric Shock Prevention</b>	Class I

<b>Waterproof Class Indoor</b>	IPX0
<b>Waterproof Class Outdoor</b>	IPX4
<b>Refrigerant</b>	R410A
<b>Charge (kg)</b>	1.15kg
<b>Loading Capacity (40' HC)</b>	144



## Diamond Series - Rotary



### GS-R325X

<b>T1 Cooling Capacity (Btu/h)</b>	30000
<b>T3 Cooling Capacity (W)</b>	7400
<b>T3 EER for Cooling (Btu/h)/W</b>	11.67 / 8.65
<b>Cooling Power (kW)</b>	2.39kW / 2.92kW
<b>Cooling Current (A)</b>	10.7A / 13.5A
<b>Max Power Input (kW)</b>	2.92kW
<b>Max Current (A)</b>	18.0A
<b>Air Volume (m3/h)</b>	1600m3/h
<b>Power Supply</b>	220-240V~/50Hz
<b>Max High Pressure (MPa)</b>	4.3MPa
<b>Max Low Pressure (MPa)</b>	1.15MPa

<b>Inside Noise Level (dB(A))</b>	52dB(A)
<b>Outside Noise Level (dB(A))</b>	6dB(A)
<b>Compressor Type</b>	T3 Rotary
<b>Compressor MFG</b>	HIGHLY
<b>Compressor Model</b>	ASH295UV-C8DUA
<b>Indoor Unit Dimensions (mm)</b>	1250x360x253
<b>Outdoor Unit Dimensions (mm)</b>	970x805x395
<b>Net Weight Indoor Unit (kg)</b>	16kg
<b>Net Weight Outdoor Unit (kg)</b>	61.5kg
<b>Gross Weight Indoor Unit (kg)</b>	22kg
<b>Gross Weight Outdoor Unit (kg)</b>	67kg
<b>Electric Shock Prevention</b>	Class I
<b>Waterproof Class Indoor</b>	IPX0
<b>Waterproof Class Outdoor</b>	IPX4
<b>Refrigerant</b>	R410A
<b>Charge (kg)</b>	2.45kg
<b>Loading Capacity (40' HC)</b>	98

## GS-R375X

<b>T1 Cooling Capacity (Btu/h)</b>	36000
<b>T3 Cooling Capacity (W)</b>	7400
<b>T3 EER for Cooling (Btu/h)/W</b>	11.719 / 8.417
<b>Cooling Power (kW)</b>	2.56kW / 3.00kW
<b>Cooling Current (A)</b>	12.0A / 13.5A
<b>Max Power Input (kW)</b>	3.6kW
<b>Max Current (A)</b>	20.0A
<b>Air Volume (m<sup>3</sup>/h)</b>	1650m <sup>3</sup> /h
<b>Power Supply</b>	220-240V~/50Hz
<b>Max High Pressure (MPa)</b>	4.3MPa
<b>Max Low Pressure (MPa)</b>	1.15MPa
<b>Inside Noise Level (dB(A))</b>	51dB(A)
<b>Outside Noise Level (dB(A))</b>	60dB(A)
<b>Compressor Type</b>	T3 Rotary
<b>Compressor MFG</b>	HIGHLY
<b>Compressor Model</b>	ATH325MV-C9EU
<b>Indoor Unit Dimensions (mm)</b>	1250x360x253
<b>Outdoor Unit Dimensions (mm)</b>	970x805x395
<b>Net Weight Indoor Unit (kg)</b>	18kg
<b>Net Weight Outdoor Unit (kg)</b>	65kg
<b>Gross Weight Indoor Unit (kg)</b>	22kg
<b>Gross Weight Outdoor Unit (kg)</b>	65kg
<b>Electric Shock Prevention</b>	Class I

<b>Waterproof Class Indoor</b>	IPX0
<b>Waterproof Class Outdoor</b>	IPX4
<b>Refrigerant</b>	R410A
<b>Charge (kg)</b>	2.15kg
<b>Loading Capacity (40' HC)</b>	98