




Cooling T3 Rotary Compressor

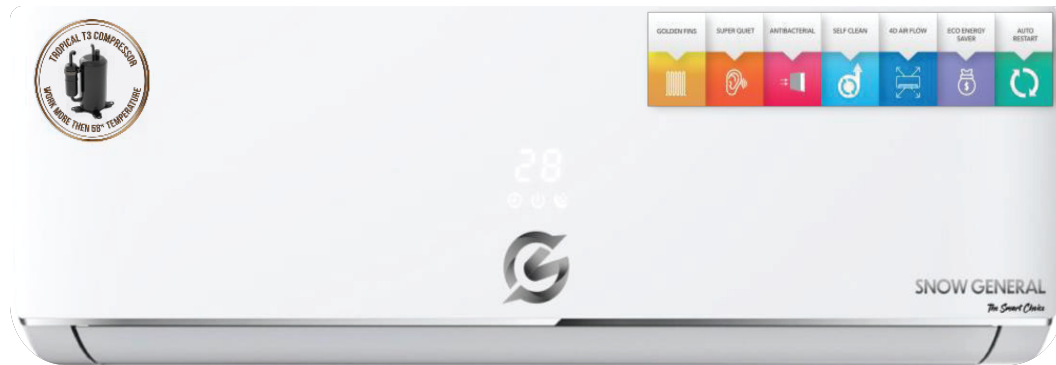

GS-R324C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	32000
ESMA Cooling Capacity (Btu/h)	24225
T1 Rated Input Cooling (W)	2350
T3 Rated Input Cooling (W)	2770
Moisture Removal (L/h)	2.8
Air Circulation (CMH Max)	1700
T1 EER For Cooling (Btu/h.W)	12.35
T3 EER For Cooling (Btu/h.W)	8.76
Refrigerant (Type/Kg)	R410A
I/U Noise Level High (dB(A))	47
I/U Noise Level Low (dB(A))	40
O/U Noise Level (dB(A))	60

Power Supply (V/Hz)	220 - 240V~, 50Hz
Rated Current Cooling (A)	10.7 / 12.5
Compressor Type	Rotary
Compressor MFG	GMCC / Highly
Compressor Model No	PA291X3CS - 7MTM
Expansion Device	Throttle Tube
Connecting Pipe Liquid (inch)	3/8
Connecting Pipe Gas (inch)	5/8
Net Dimensions - Indoor Unit (mm)	1350x367x266
Net Dimensions - Outdoor Unit (mm)	885x795x366
Net Weight Indoor Unit (Kg)	18
Net Weight Outdoor Unit (Kg)	62
Packing Dimensions - Indoor Unit (mm)	1425x435x325
Packing Dimensions - Outdoor Unit (mm)	1050x910x500
Gross Weight Indoor Unit (Kg)	21
Gross Weight Outdoor Unit (Kg)	73
Loading Capacity (40' HC)	104