




Aviator AC - Cooling & Heating

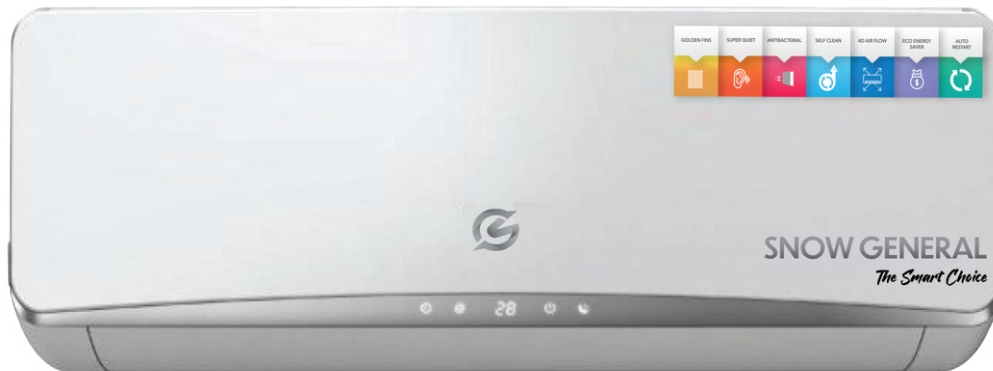

GS-R12HC

Type	T1 HeatPump
T1 Cooling Capacity (Btu/h)	12000
T1 Cooling Capacity (W)	3517
T1 Input Cooling (W)	1150
T1 EER for Cooling (Btu/W)	10.20
Heating Capacity (Btu/h)	12000
Heating Capacity (W)	3517
Input Heating (W)	1030
COP for Heating (W/W)	3.43
Air Circulation (CMH Max)	660
Refrigerant	R410A

Indoor Noise Level High (dB(A))	38
Indoor Noise Level Low (dB(A))	33
Outdoor Noise Level (dB(A))	52
Power Supply (Voltage/Frequency/Phase)	220-240V/50Hz/1P
Cooling Current Input (A)	5.3
Heating Current Input (A)	4.8
Compressor Type	Rotary
Compressor MFG	GMCC
Compressor Model	KSM133V2VFTL
Expansion Device	Throttle Tube
Evaporator	Copper and Aluminum Fin
Condenser	Copper and Aluminum Fin
Liquid Pipe (inch)	1/4
Gas Pipe (inch)	1/2
Indoor Unit Dimensions (mm)	850 × 212 × 270
Outdoor Unit Dimensions (mm)	715 × 540 × 240
Net Weight Indoor (kg)	8.5
Net Weight Outdoor (kg)	27
Packing Dimensions Indoor (mm)	870 × 335 × 265
Packing Dimensions Outdoor (mm)	845 × 340 × 600
Gross Weight Indoor (kg)	11
Gross Weight Outdoor (kg)	29
Loading Capacity (40' HC)	126 / 260 / 290