




Cooling Piston Compressor

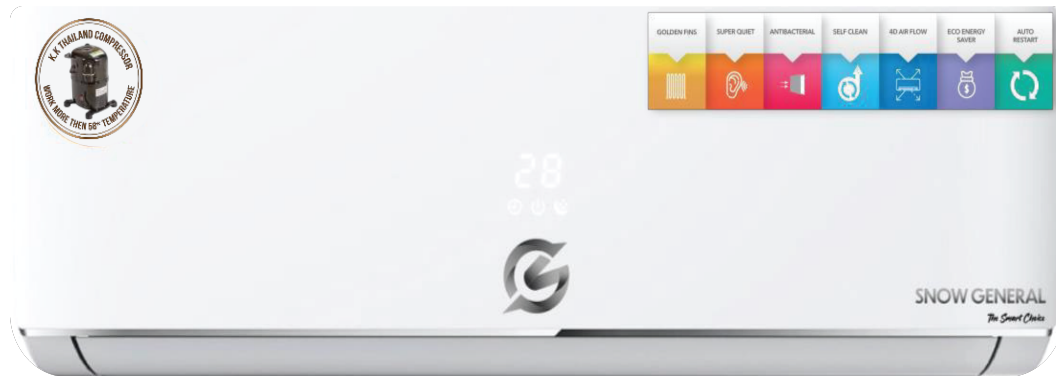

GS-P266C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	26000
ESMA Cooling Capacity (Btu/h)	20130
Rated Input Cooling (W)	2465 / 2840
Moisture Removal (L/h)	-
Air Circulation Super (m3/h)	1200
EER For Cooling (W/W)	2.75 / 2.08
Refrigerant (Type/Kg)	R22
I/U Noise Level High (dB(A))	45
O/U Noise Level (dB(A))	57
Power Supply (Voltage/Frequency)	220-240V~, 50Hz
Rated Current Cooling (A)	11.6 / 12.9

LRA (A)	73
Compressor Type	Reciprocating
Compressor MFG	KK - Made In Thailand
Compressor Model No	AW5530EK 65H - A1
Capacity (W)	7327
Input (W)	2498
Rated Current (RLA) A	12
Indoor Fan Motor Voltage, Frequency (V,Hz)	1, 208-240V~, 50Hz
Model	DG13B2-07 (30)
Power Supply (V)	12V DC
Output (W)	4
Expansion Device	Throttling Pipe
Connecting Pipe Liquid (inch)	1/4
Connecting Pipe Gas (inch)	5/8
Connecting Cable	3x2.5 mm ²
Net Dimensions Indoor (mm)	1131x235x315
Net Dimensions Outdoor (mm)	995x720x420
Net Weight Indoor (Kg)	14.5
Net Weight Outdoor (Kg)	57
Packing Dimensions Indoor (mm)	1220x310x400
Packing Dimensions Outdoor (mm)	995x420x720
Gross Weight Indoor (Kg)	17
Gross Weight Outdoor (Kg)	64
Loading Capacity (40' HC)	150